

XXL Pro - Cardprinter

cards[®]
& more

... for smart solutions

Flexibility for oversized cards

The next generation printer for oversized cards, the XXL Pro, comes with a number of professional features. Fast, easy to use, and reliable, the XXL Pro features a high security watermark (applied during the print cycle without incurring extra consumables costs), a Plug & Play driver, standard native USB, Ethernet and Parallel all fitted as a standard, a convenient display, a selection switch for the card printing area position, a three year warranty, and an easy "drop in" printhead exchange.

The XXL Pro is the professional's choice for ticketing and accreditation purposes, where oversized cards are used for example in sports and music events.

Preprinted XXL- cards sized 124,8 x 87,8 mm or 140,0 x 87,8 mm can be personalized within an maximum area of 86,0 x 54,0 mm individually. The recommended print area is 82,0 x 51,0 mm. With the new double print function, using a special firmware, the new X-series driver, and sending a front and back design to the printer, almost the complete surface of the cards can be printed edge to edge in one process by printing the „front“ design first, then moving the card to the unprinted area and printing the „back“ design there (with an adapted print size and approx. 1 mm distance between the two printing areas).

Visitors are issued convenient, large size badges in a matter of seconds. Optionally, the inline encoding of contactless chips is possible.

XXL Pro - The new specialist for special events.



Oversized XXL passes have proven to be very popular for events: They are easily noticed from a distance and they leave enough room for generic and individual information (including a large photograph, where applicable) as well as for advertising or maps and rules.

The professional XXL-Card Printer


Technical Specifications




- Card Security: HoloKote[®] anti-copying watermark across entire printing area.
- Warranty: Three years warranty which includes full printhead coverage.
- Printer Interfaces: Parallel, USB and ethernet interfaces all included.
- Software Drivers: Windows 2000, Windows 2003 server user-mode, and XP drivers supplied with printer.
- Dye Film: LC1: YMCKO panel dye film 350 images per roll (Part No. M9005-751).
 LC3 : Monochrome resin black 1000 images per roll (Part No. M9005-753).
 LC6 : KO panel dyefilm (black and overcoat) 600 images per roll (Part No. M9005-756).
 Range of monochrome ribbons (red, blue, green, gold, silver or white) 1000 images per roll.
- Card Thickness: 0.76 to 1.6 mm (0.029" to 0.063").
- Card Capacity: 100 cards feed hopper, 50 cards output stacker.
- Power Source: Internal power supply 90-265V 47-63Hz autoranging.
- Print Speed: Colour 22 seconds a side. Mono 6 seconds.
- Cleaning: Using externally fed cleaning-card plus replaceable cleaning roller.
- Weight: 7.5 kg (16.5 lbs)
- Environment: Sheltered Office environment 10°C to 30°C (50°F to 85°F).
- Dimensions: 193.5 mm width x 232.5 mm height x 620 mm length (7.6" width x 9.15" height x 24.41" length) including hopper and stacker.




RoHS compliant




Card size
124,8 mm x 87,8 mm

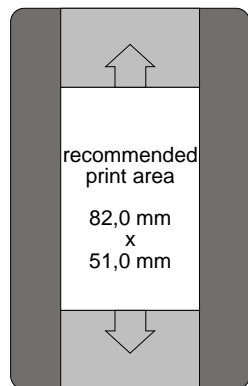

Card size
140,0 mm x 87,8 mm

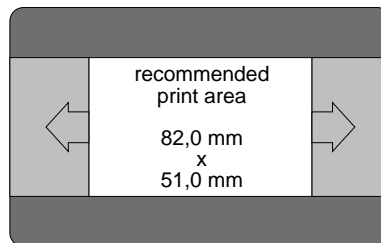

Card size
140,0 mm x 87,8 mm

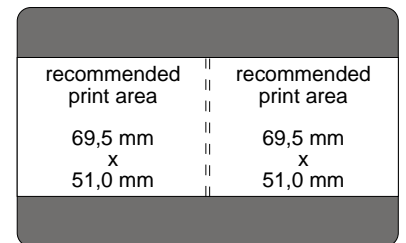

Card size
140,0 mm x 87,8 mm